



Fuel Ox with Combustion Catalyst is a cutting-edge fuel additive engineered to enhance engine performance and longevity. By promoting more complete combustion, this revolutionary formula maximizes fuel efficiency while reducing harmful emissions. Its unique composition also helps prevent fuel degradation, moisture accumulation, and engine deposits, ensuring optimal fuel quality and engine cleanliness. Trusted by drivers and fleet managers worldwide, Fuel Ox with Combustion Catalyst is the go-to solution for achieving peak engine performance and environmental sustainability.

FEATURES

- 1 ounce of Fuel Ox® treats up to 80 gallons of fuel
- Completely soluble in all petroleum based fuels including gasoline, diesel, kerosene, and heavy fuel oils
- Cleans out fuel system & removes sludge
- Lubricates fuel system
- Increases horsepower
- Protects against corrosion
- Protects against ethanol issues
- Removes water (emulsifier)
- Increases fuel efficiency by as much as 5-10%
- Reduces emissions/regenerations by as much as 50% or more
- Stabilizes fuel for up to two years
 - Slows down the process of phase separation

SPECIFICATIONS

APPEARANCE:	Amber to Orange Liquid
ODOR:	Organic, Solvent
FLASH POINT:	164°F PMCC
FORM:	Liquid
SOLUBILITY IN FUEL:	100%
VISCOSITY @ 40°C:	12.9 cps
DENSITY:	6.86 lbs/gal
FLAMMABILITY:	Combustible liquid
TREATMENT RATIO:	1 : 10,000
CERTIFICATIONS:	ASTM (D-975)

STANDARDS

- American Society for Testing and Materials Specification (ASTM-D975)
- Naval Sea Systems Command (SEA 51222)
- Military Specification (MIL-L87177a)
- Department of Defense Specification (DOD-A-24682)
- Environmental Protection Agency (EPA) Registered


TREATMENT RATIO

US SIZE	METRIC SIZE	GALLONS TREATED	LITERS TREATED
8 ounces	250 ml	625 gallons	2,500 L
16 ounces	500 ml	1,250 gallons	5,000 L
1 gallon	3,785 ml	10,000 gallons	37,854 L
55 gallon drum	208 liter drum	550,000 gallons	2,080,000 L




The following results were compiled at a large mine in Peru which was at an elevation of 14,000 feet. All observations were compiled by a third party testing service.


EMISSION TEMPERATURE

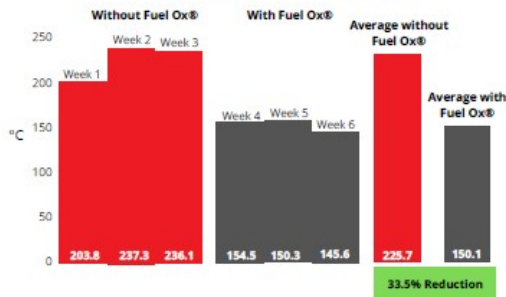


PARTICULATE MATTER (MP)

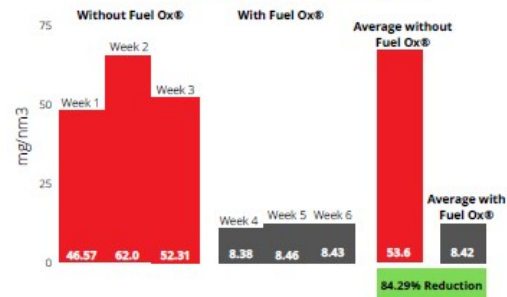


HYDROGEN SULFIDE (H2S)

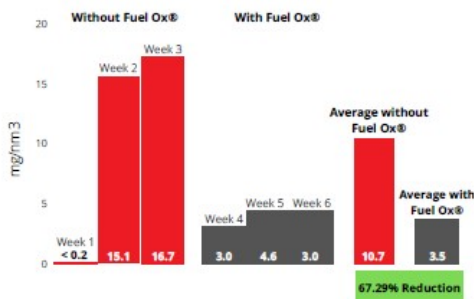


NITROGEN OXIDES (NOX)

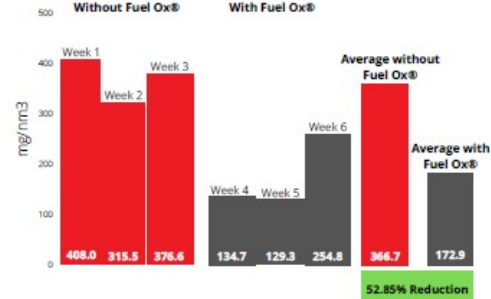

NITROGEN MONOXIDE (NO)

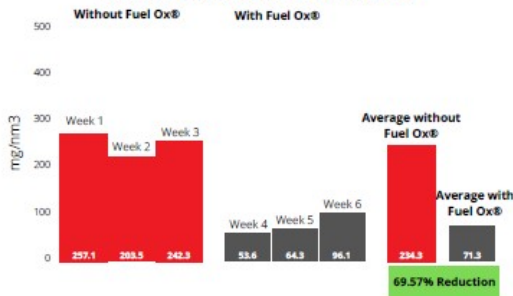

SULFUR DIOXIDE (SO2)

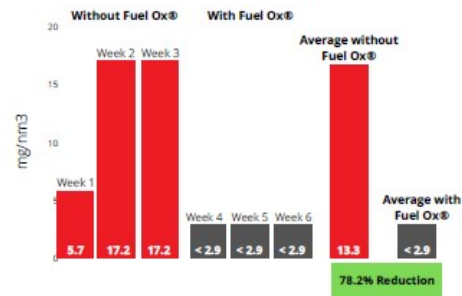

Paul Howlett
Managing Director
United Kingdom & Eastern Hemisphere Distribution Partner for Fuelox LLC Products

SUDELAC® - FUEL OX™

United Kingdom & Eastern Hemisphere Distribution Partner for Fuelox LLC Products

Telephone: +44(0) 1224 472572 (Main Office Number), Mobile/Cell: +44(0) 7831 141933, Email: paulhowlett@sudelac.com

Providing Fuel Additives and Eco-Friendly Lubricants that Reduce Emissions, Increase Efficiency and Lower Operating-Maintenance Costs

https://www.uk.energytechnologyplatform.com/product_service/sudelac-fuelox-fuel-treatment

Info@sudelac.com
www.sudelac.com

SUDELAC®